



"Летний комплект" для электрического обогрева позволяет использовать полотенцесушитель в холодные дни без необходимости подключения к системе центрального отопления. Электрический элемент обогрева нагревает только полотенцесушитель в ванной комнате. Комплект для электрического обогрева никак не влияет на циркуляцию воды при подключении центрального отопления, следовательно, его не нужно снимать после установки.

Расположение:


"Летний комплект" для электрического обогрева рекомендуется устанавливать в ванной или душевой комнате. Комплект изготовлен по стандартам IP44, следовательно его можно установить в Зоне №2 (см. ниже), но подключение к источнику питания должно находиться вне Зоны №2.

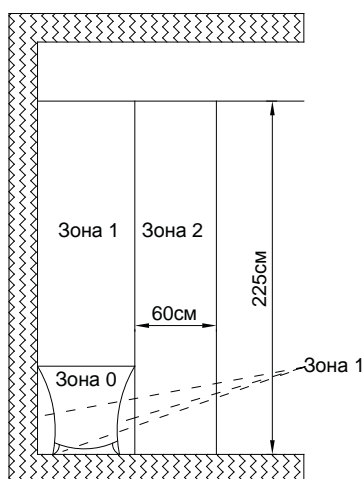

(1) Вид сбоку, ванна

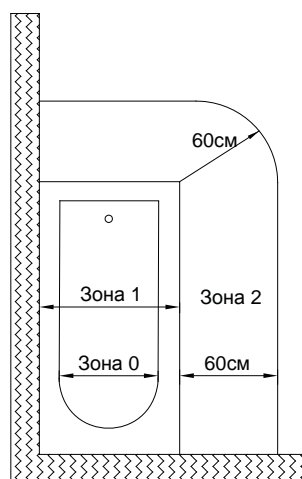

(2) Вид сверху

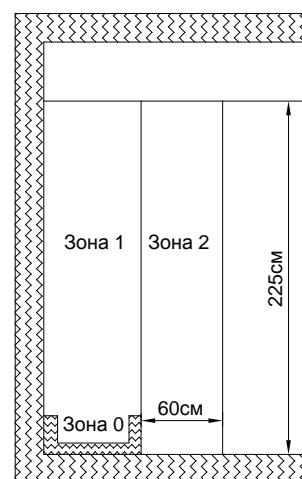

(3) Вид сбоку, душевая

Установка на полотенцесушитель:

"Летний комплект" для электрического обогрева представляет собой герметический электрический элемент с переходником с резьбой. Электрический элемент можно вставлять исключительно в полотенцесушитель с прямым сечением трубы (т.е. невозможно подключение к двойной панели радиатора). Устанавливать электрический комплект должен сантехник.

Перед установкой полотенцесушитель нужно отключить от центрального отопления перекрыв To install, the bathroom radiator must be isolated from the rest of the central heating system by closing its shut-off/control valves, and then drained. If isolation cannot be achieved, then the complete central heating system must be drained down to below the level of the bathroom radiator (note that when refilling it may be necessary to top-up any corrosion inhibitor in the system). The adaptor must first be inserted into the radiator and tightened onto its 'O' ring seal (this adaptor still allows a flow of water when the central heating pump is running). Do not overtighten as this may damage the seal. The heating element should then be inserted into the radiator through this adaptor and tightened onto its 'O' ring seal. Again, do not overtighten. The other connection of the adaptor should be connected to the incoming central heating pipe. Finally, the isolating valves should be opened and the radiator bled of all air.

Electrical

connection

The sealed heating element is supplied complete with its own mains cable. Do not use an extension cable. It is a wire product which must be earthed. It should be connected to the household fixed wiring by a qualified electrician in accordance with the national Wiring Regulations (BS 1363). A switch for disconnection from the electricity supply, having a contact separation in all poles that provide full disconnection under overvoltage category III conditions, must be incorporated in the fixed wiring. A switched spur outlet incorporating a fuse may be used, but this must be positioned outside the Zone 2 area (i.e. further away from the bath or shower). The national Wiring Regulations also require that each circuit supplying a bathroom must be protected by a 30mA RCD in its supply.

USER INSTRUCTIONS

Safety warnings:

- a) This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- b) Children should be supervised to ensure that they do not play with the appliance.
- c) As when the central heating system is operating, this summer electric heating kit will cause the bathroom radiator to get hot to touch during operation.
- d) Switch off the heating element at the supply when not in use.
- e) Do not operate the heating element when there is no water in the radiator. It incorporates an overheat protection thermal fuse which may blow if this occurs.
- f) If the mains supply cable to the heating element becomes damaged it must be replaced by the manufacturer, its service agent or a similarly qualified person in order to avoid a hazard.


Operation:

When the electricity supply is switched on the bathroom radiator will heat up. The heating element incorporates an integral fixed temperature thermostat, so no temperature adjustment is necessary.

Tools Required:



Parts Supplied:

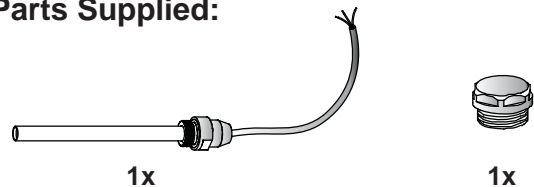

The table below is a guide to help choose which summer electric heating kit is most suitable for which radiator.

Summer Electric Heating Kit	Radiator Output		
	Cleaver & Berkeley & Vincent	Bloomsbury	Trafalgar
150W	X		
250W		X	
400W			X

